

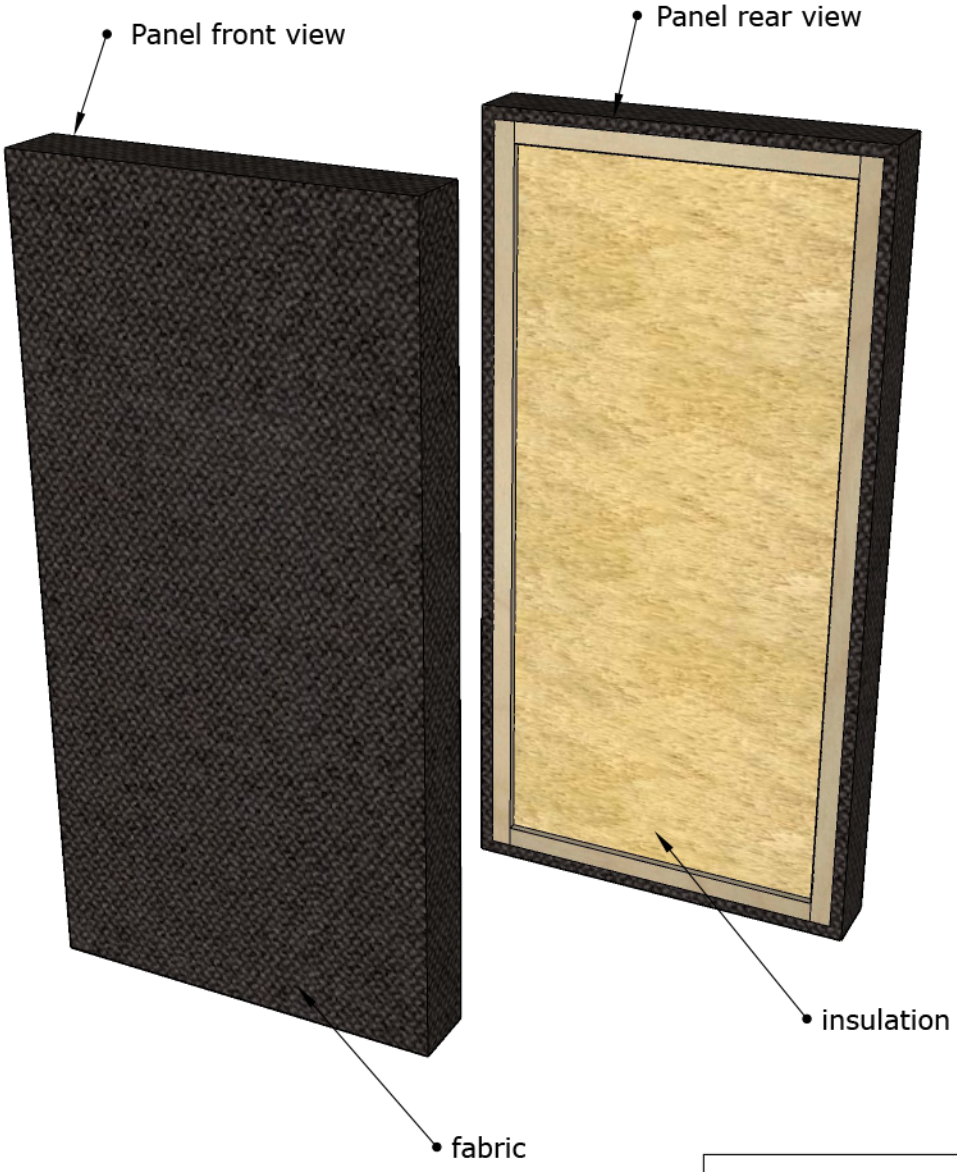


Mounting Methods

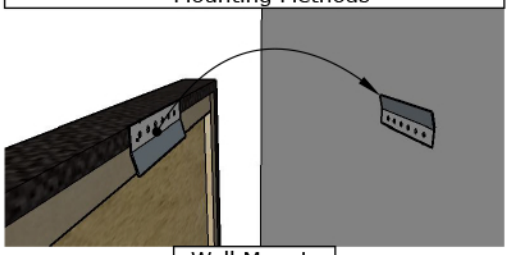


Wall Mount

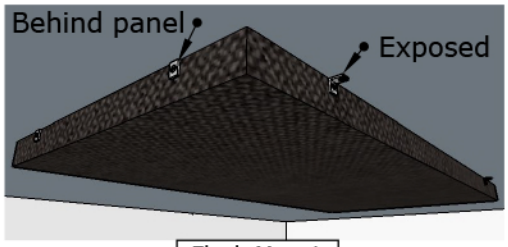


Flush Mount

3/4" Corner Braces - Ceiling Attachment
Behind Panel vs. Exposed

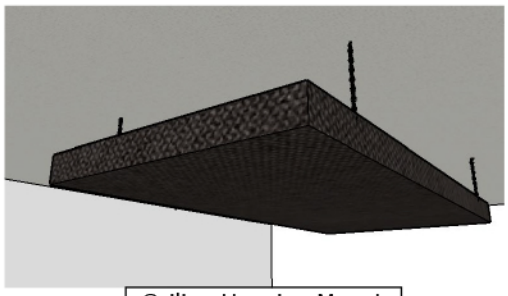

Ceiling Hanging Mount




Freestanding

Cross-Section View



Profile Options:



Fabric Wrapped Acoustic Panels

Size Info: Standard size is 24" x 48" x 4" (actual frame depth is 3.5"). Custom sizes and shapes available.
Weight Info: Approx. 2.725 lbs./sq. ft. Weight may vary based on fabric and insulation options.
Fabric Options: In Stock Fabrics, Guilford of Maine, Suede, Custom Prints, Client-Provided Fabric
Insulation Options: Rock Wool Insulation, Other Options Available
Mounting Options: Walls, Ceilings, Freestanding
Fire Rating Info: ASTM E84 Class A with Guilford of Maine Fabric or other Fire Rated Fabric option
Acoustical Info:
Wall Mounted Absorption Coefficients:
125 Hz: .85 | 250 Hz: 1.19 | 500 Hz: 1.13 | 1,000 Hz: 1.03 | 2,000 Hz: 1.03 | 4000 Hz: 1.02 | 8000 Hz: .99 | 10000 Hz: 1.03 ***NRC 1.10***
5" Gap From Wall /Ceiling Absorption Coefficients:
125 Hz: .83 | 250 Hz: 1.48 | 500 Hz: 1.45 | 1,000 Hz: 1.28 | 2,000 Hz: 1.21 | 4000 Hz: 1.18 | 8000 Hz: 1.17 | 10000 Hz: 1.16 ***NRC 1.35***

better sound acoustics
16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@bettersound.com
www.bettersound.com