


Acoustical Core Material Options

Polyester (American-Made)

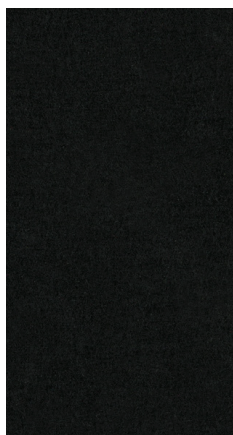

Black

ECO-50-B
ECO-100-3-B
ECO-100-6-B
ECO-200-B



White

ECO-50-W
ECO-100-3-W
ECO-100-6-W
ECO-200-W

American-Made Polyester

Content: 100% American-made Polyester
(55% PET-Recycled Fiber, 45% PET-Virgin Fiber)

Thickness:

12.5 mm (1/2") - 11 PCF
25 mm (1") - 3 or 6 PCF
50.8 mm (2") - 4.7-5.0 PCF

Standard Sizes Used: 60" x 120"

**Can be cut to size needed*

Sustainability:

Made 100% in America
MAS Certified Green
LEED v4.1 ID+C, BD+C
CHPS 2019 Core Criteria 3.0 EQ C6.1.6

Performance:

Fire Rating: Passes ASTM-E84

Class A | Flame Spread: 25 | Burn: 400

NRC Rating ASTM C423

(Mounting Method Type A)

Material: 1/2" Polyester: 0.45
Material: 1" Polyester: 0.80
Material: 2" Polyester: 1.10

(Mounting Method Type F25)

Material: 1/2" Polyester: 0.65
Material: 1" Polyester: 0.90
Material: 2" Polyester: *estimated over 1.10

Miscellaneous:

- Naturally Acoustical
- High Impact
- Tackable
- Formaldehyde Free
- Dust Free
- Consistent Color
- Does Not Promote Mildew
- Extremely Resilient
- No Binding Agents

Origin:

- AME Polyester: Made in the USA
- All Products Assembled in the USA

Warranty: All products are warranted against workmanship and manufacturing defects for five (5) years from date of purchase.



better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@bettersound.com
www.bettersound.com