

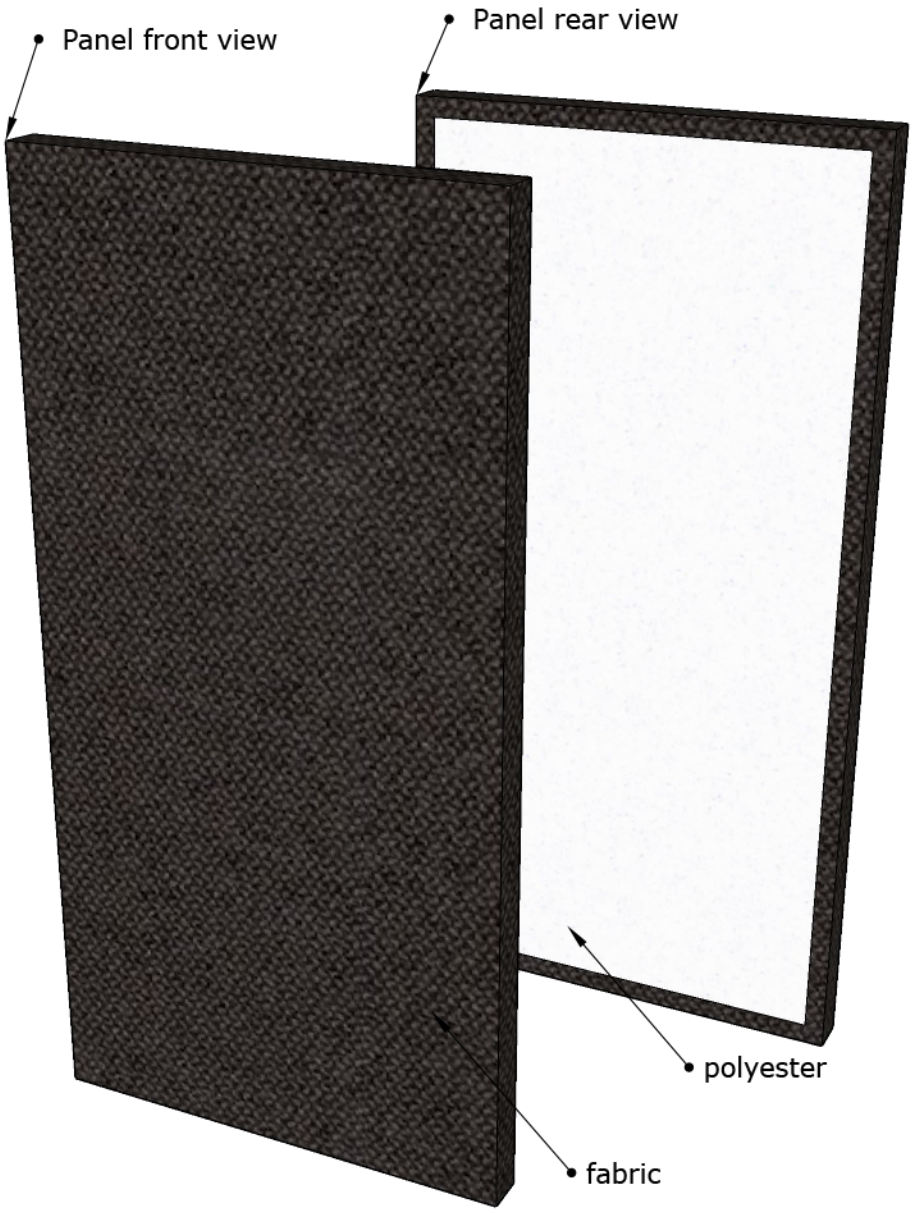


Mounting Methods

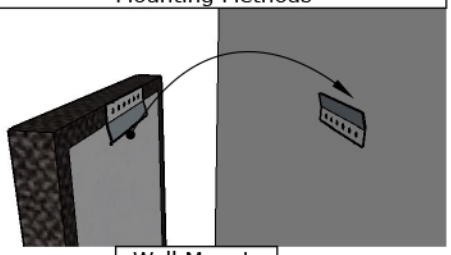


Wall Mount

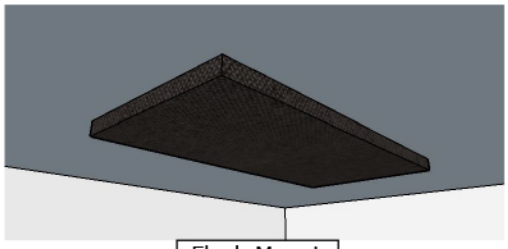


Flush Mount

3M Spray 90 + Construction Adhesive

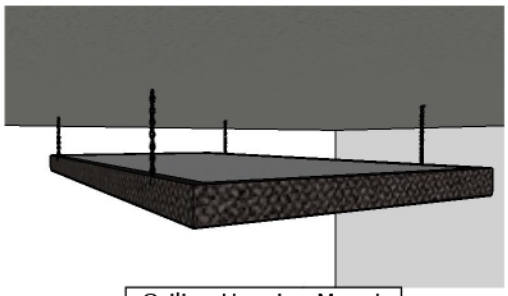

Ceiling Hanging Mount




Freestanding

Cross-Section View



Profile Options:

Square Beveled



Fabric Wrapped Acoustic Panels

Size Info: Available in 1” and 2” depths. Custom sizes and shapes available.
Weight Info: 2” depth Approx. 1.0625 lbs./sq. ft. 1” depth Approx. .53125 lbs./sq. ft. Weight may vary based on fabric choice
Fabric Options: In Stock Fabrics, Guilford of Maine, Suede, Custom Prints, Client-Provided Fabric
Insulation Options: 100% Polyester Insulation (60% PET Recycled Fiber, 40% PET Virgin Fiber)
Mounting Options: Walls, Ceilings, Freestanding
Fire Rating Info: ASTM E84 Class A with Guilford of Maine Fabric or other Fire Rated Fabric option
Acoustical Info:
Wall Mounted Absorption Coefficients:
1” 250 Hz: .28 I 500 Hz: .66 I 1,000 Hz: 1.02 I 2,000 Hz: 1.03 I NRC: .75
2” 250 Hz: .79 I 500 Hz: 1.05 I 1,000 Hz: 1.12 I 2,000 Hz: .99 I NRC: 1.0

better sound acoustics
16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@bettersound.com
www.bettersound.com