



*3D Pop in Bubbles in AME-017 Ocean.

3D Pop Screen Collection

Material: American-Made Polyester: 100% Polyester (55% PET-Recycled Fiber, 45% PET-Virgin Fiber)
ECC Polyester Colours: 100% Polyester.

Standard Screen Sizes:

48" x 120" in American-Made Polyester
48 x 108" in ECC Polyester Colours

Thickness:

American-Made Polyester
1/2" (0.50"/12.5mm) - 11 pcf
1" (1"/25mm) - 7 pcf
ECC Polyester
1/2" (0.47/12mm) - 12 pcf.

Mounting Methods:

Wall Applications: Common installation methods include construction adhesive with finish nails, mechanical Z-Clips and Z-bars, Velcro, and concealed edge clips.

Suspended Applications: C-Channels are available for 1/2" and 1" screens.

Use the Gripper System for fixed installations. For movable screens, install with trolleys.

*Each method has different requirements for fastening the hardware to the panel and will be determined before production of panels begin.

Field Cutting: Panels can be cut using standard utility knives with sharp blades. Power saws equipped with negative rake blades can also be used.

Origin: American-Made Polyester: 100%
Manufactured and Assembled in the US. ECC
Polyester: 100% Assembled in the US.

Sustainability:

AME: Minimum 55% recycled content

American-Made Polyester Certifications: MAS
Certified Green LEED v4.1 ID+C, BD+C CHPS 2019
Core Criteria 3.0 EQ C6.1.6

Performance:

ASTM E84
AME and ECC:
Meets or Exceeds Class A Rating

Performance:

NRC Rating ASTM C423
Type A Mount
0.5" AME Polyester : 0.45
1" AME Polyester : 0.75
0.5" ECC Polyester : 0.45


Warranty: AME: All products are warranted against workmanship and manufacturing defects for five (5) years from date of purchase. ECC: All products are warranted against workmanship and manufacturing defects for two (2) years from date of purchase.




better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@betersound.com
www.betersound.com


Standard Designs

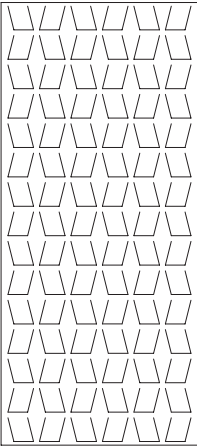


Stack

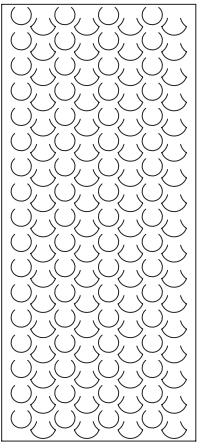


Scales

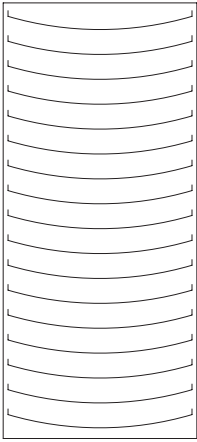


Scoop

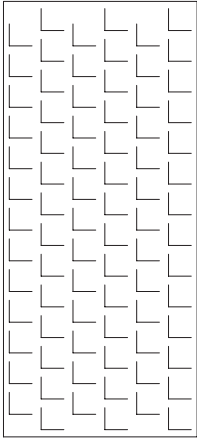


Cubed

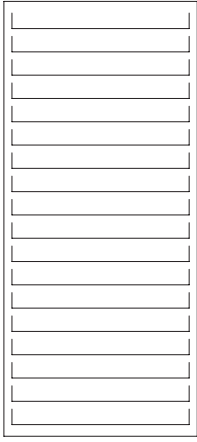


Louvers

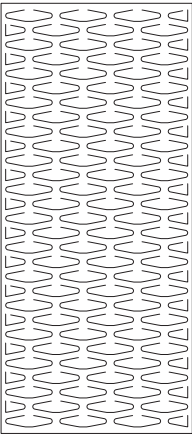


Grate

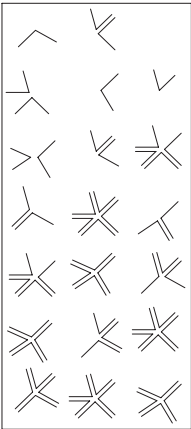


Sticks

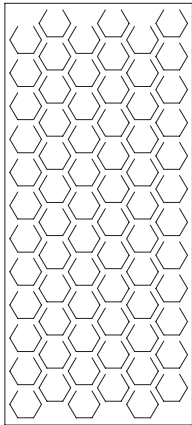


Hex

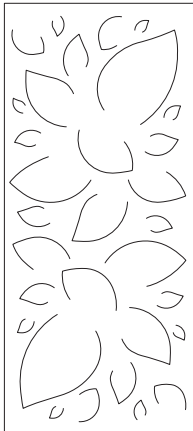


Floral

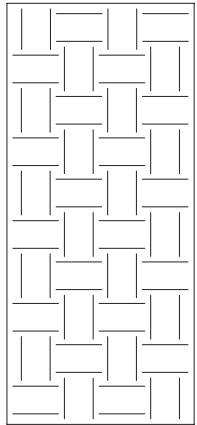


Weave

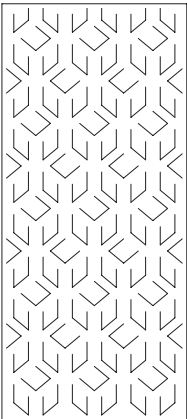


Divide

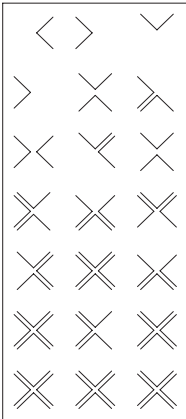


Jacks

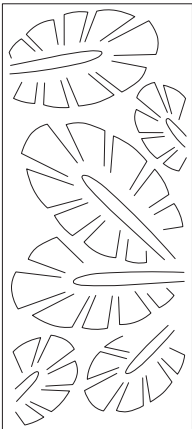

Island

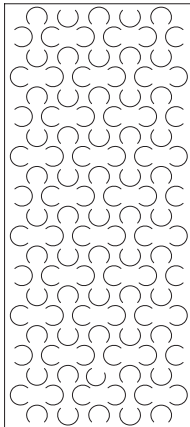

Bubbles

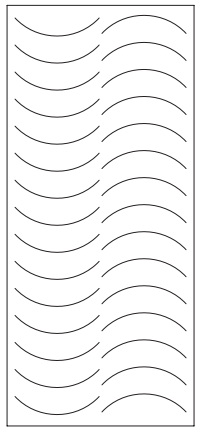

Waves



better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@bettersound.com
www.bettersound.com

Color Options




Black * 0
AME-01



Pearl White * 0
AME-07



Charcoal *
AME-02



Dark Grey
AME-03



Silver Grey *
AME-04



Light Grey
AME-19



Ocean
AME-17



Denim
AME-18



Walnut
AME-14



Dark Brown
AME-06



Light Khaki
AME-05



Barley
AME-09



Ivory
AME-08

American-Made Polyester

Content: 100% American-made Polyester (55% PET-Recycled Fiber, 45% PET-Virgin Fiber)

Size: 49" x 121"

Weight:

1/2 lb/sf (12.5 mm) 11 PCF

1.0 lb/sf (25 mm) 7 PCF

1.5 lb/sf (50.8 mm) 4.7 - 5.0 PCF

Thickness: 12.5 mm (0.50"), 25mm (1") or 50.8 mm (2")

Acoustical Performance:

NRC Rating ASTM C423

(Mounting Method Type A)

Material: 0.5" Polyester: 0.45

Material: 1" Polyester: 0.80

Material: 2" Polyester: 1.10

(Mounting Method Type F25)

Material: 0.5" Polyester: 0.65

Material: 1" Polyester: 0.90

Material: 2" Polyester: *estimated over 1.1

(Mounting Method Type J)

Material: 0.5" Polyester: 0.55

Material: 1" Polyester: 0.75

Material: 2" Polyester: *estimated 1.1

Sustainability:

Made 100% in America

MAS Certified Green

LEED v4.1 ID+C, BD+C

CHPS 2019 Core Criteria 3.0 EQ C6.1.6

Fire Rating: Passes ASTM-E84

Origin: 100% Manufactured and Assembled in the US.

Warranty: All products are warranted against workmanship and manufacturing defects for five (5) years from date of purchase.

* = Colorways Available in 2" Polyester

0 = Value Color Options



better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@bettersound.com
www.bettersound.com

Wood Grain Color Options



White Oak
AME-WG-20



Natural
AME-WG-21



Cashmere
AME-WG-22



Ash
AME-WG-23



Vintage Oak
AME-WG-24



Coffee Bean
AME-WG-25



Milkwood
AME-WG-26



Walnut
AME-WG-27



Charred
AME-WG-28



Teak
AME-WG-29

American-Made Polyester

Content: 100% American-made Polyester (55% PET-Recycled Fiber, 45% PET-Virgin Fiber)

Size: 49" x 121"

Weight:

1/2 lb/sf (12.5 mm) 11 PCF

1.0 lb/sf (25 mm) 7 PCF

Thickness: 12.5 mm (0.50") or 25mm (1")

Acoustical Performance:

NRC Rating ASTM C423

(*Mounting Method Type A*)

Digitally Printed Material: 0.5" Polyester: 0.50

Digitally Printed Material: 1" Polyester: 0.80

Material: 2" Polyester: 1.10

(*Mounting Method Type F25*)

Material: 0.5" Polyester: 0.65

Material: 1" Polyester: 0.90

Material: 2" Polyester: *estimated over 1.1

(*Mounting Method Type J*)

Material: 0.5" Polyester: 0.55

Material: 1" Polyester: 0.75

Material: 2" Polyester: *estimated 1.1

Sustainability:

Made 100% in America

MAS Certified Green

LEED v4.1 ID+C, BD+C

CHPS 2019 Core Criteria 3.0 EQ C6.1.6

Fire Rating: Passes ASTM-E84

Origin: 100% Manufactured and Assembled in the US.

Warranty: All products are warranted against workmanship and manufacturing defects for five (5) years from date of purchase.



better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@bettersound.com
www.bettersound.com

Color Options



Milk White
ECC-08



Orange
ECC-06



Lime Green
ECC-10



Sky Blue
ECC-11



Navy Blue
ECC-12



Coffee
ECC-13



Blush Red
ECC-14



Yellow
ECC-115

Polyester Colours

Content: 100% Polyester

Size: 48.23" x 110"

Weight: 1/2 lb/sf (12 mm) 12 pcf

Thickness: 12 mm (0.47")

Acoustical Performance:

1/2"	Frequency/Hz	250	500	1000	2000	NRC
Distance From Wall	0mm	0.05	0.25	0.61	0.85	0.45
	50mm	0.46	0.80	1.04	1.00	0.80
	150mm	0.69	0.96	0.92	0.94	0.90

Fire Rating: Passes ASTM-E84

Warranty: All products are warranted against workmanship and manufacturing defects for two (2) years from date of purchase.



better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@betersound.com
www.betersound.com