



Grid Baffle System

Material: American-Made Polyester: 100% Polyester
(55% PET-Recycled Fiber, 45% PET-Virgin Fiber)

ECC Polyester Colours: 100% Polyester

Standard Sizes - Slat Profiles:

Small: 2.5" D in Standard Profile

Medium: 6" D in Standard, Angular, or Fluid Profiles

Large: 9.375" D in Standard, Angular, or Fluid Profiles

*Custom Available

Standard Length: 24" L

Thickness:

AME: 0.5" (0.50"/12.5mm) - 11 PCF

ECC: 0.47" (0.47"/12 mm) - 12 PCF

Sustainability:

AME Minimum 55% recycled content

AME Certifications:

MAS Certified Green

LEED v4.1 ID+C, BD+C

CHPS 2019 Core Criteria 3.0 EQ C6.1.6

Origin:

- AME Manufactured and assembled in the US.

- ECC Assembled in the US.

Performance:

NRC Rating

AME Material: 0.45 (Mounting Method Type A)

AME Material: 0.65 (Mounting Method Type F25)

ECC Material: 0.45 - 0.80 depending on mounting distance

ASTM E84 Meets or Exceeds Class A




better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@bettersound.com
www.bettersound.com


Grid Baffle System

Grid Baffle System


Standard Designs

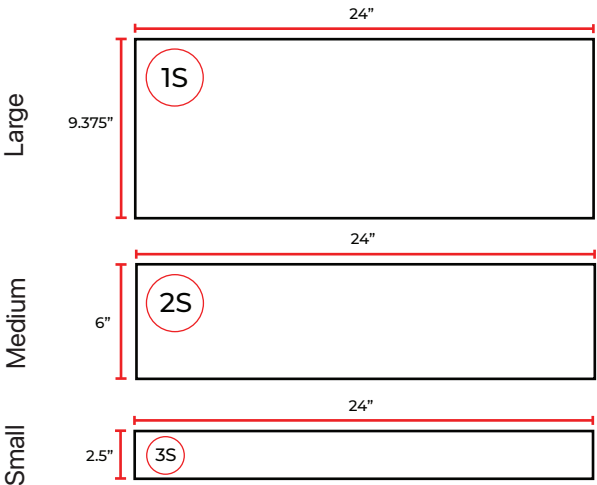

Angular Designs

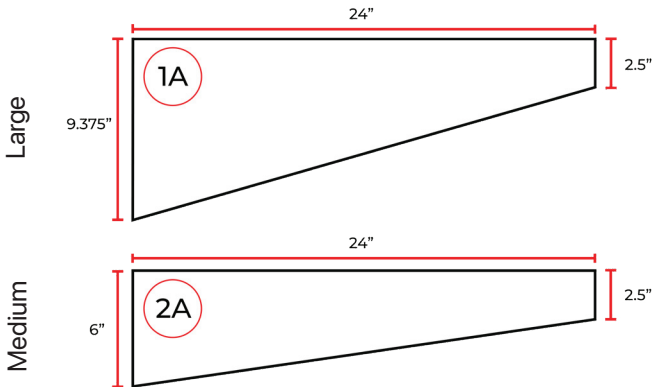

Fluid Designs

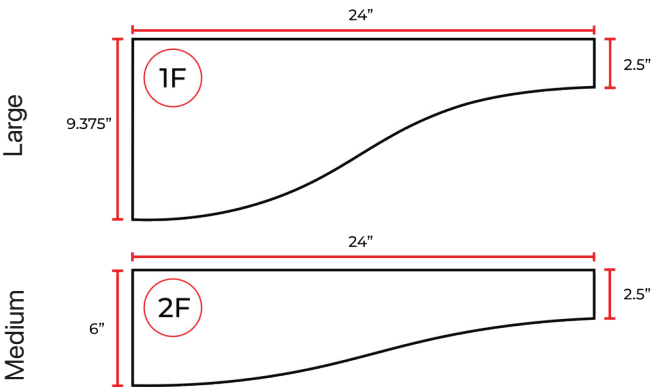

better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@betersound.com
www.betersound.com

Color Options



Black *^o
AME-01



Pearl White *^o
AME-07



Charcoal *
AME-02



Dark Grey
AME-03




Silver Grey *
AME-04



Light Grey
AME-19



Ocean
AME-17



Denim
AME-18



Walnut
AME-14



Dark Brown
AME-06



Light Khaki
AME-05



Barley
AME-09



Ivory
AME-08

American-Made Polyester

Content: 100% American-Made Polyester (55% PET-Recycled Fiber, 45% PET-Virgin Fiber)

Size: 49" x 121"

Weight:

1/2 lb/sf (12.5 mm) 11 PCF

1.0 lb/sf (25 mm) 7 PCF

1.5 lb/sf (50.8mm) - 4.7-5.0 PCF

Thickness: 12.5 mm (0.50"), 25mm (1") or 50.8mm (2")

Acoustical Performance:

NRC Rating ASTM C423

(Mounting Method Type A)

Material: 0.5" Polyester: 0.45

Material: 1" Polyester: 0.80

Material: 2" Polyester: 1.10

(Mounting Method Type F25)

Material: 0.5" Polyester: 0.65

Material: 1" Polyester: 0.90

Material: 2" Polyester: *estimated over 1.1

(Mounting Method Type J)

Material: 0.5" Polyester: 0.55

Material: 1" Polyester: 0.75

Material: 2" Polyester: *estimated 1.1

Sustainability:

Made 100% in America

MAS Certified Green

LEED v4.1 ID+C, BD+C

CHPS 2019 Core Criteria 3.0 EQ C6.1.6

Fire Rating: Passes ASTM-E84

Origin: 100% Manufactured and Assembled in the US.

Warranty: All products are warranted against workmanship and manufacturing defects for five (5) years from date of purchase.

* = Colorways Available in 2" Polyester

^o = Value Color Options



better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@bettersound.com
www.bettersound.com

Wood Grain Color Options



White Oak
AME-WG-20



Natural
AME-WG-21



Cashmere
AME-WG-22



Ash
AME-WG-23



Vintage Oak
AME-WG-24



Coffee Bean
AME-WG-25



Milkwood
AME-WG-26



Walnut
AME-WG-27



Charred
AME-WG-28



Teak
AME-WG-29

American-Made Polyester

Content: 100% American-made Polyester (55% PET-Recycled Fiber, 45% PET-Virgin Fiber)

Size: 49" x 121"

Weight:

1/2 lb/sf (12.5 mm) 11 PCF

1.0 lb/sf (25 mm) 7 PCF

Thickness: 12.5 mm (0.50") or 25mm (1")

Finish: Digitally printed with UV curable ink

Acoustical Performance:

NRC Rating ASTM C423

(Mounting Method Type A)

Digitally Printed Material: 0.5" Polyester: 0.50

Digitally Printed Material: 1" Polyester: 0.80

Material: 2" Polyester: 1.10

(Mounting Method Type F25)

Material: 0.5" Polyester: 0.65

Material: 1" Polyester: 0.90

Material: 2" Polyester: *estimated over 1.1

(Mounting Method Type J)

Material: 0.5" Polyester: 0.55

Material: 1" Polyester: 0.75

Material: 2" Polyester: *estimated 1.1

Sustainability:

Made 100% in America

MAS Certified Green

LEED v4.1 ID+C, BD+C

CHPS 2019 Core Criteria 3.0 EQ C6.1.6

Fire Rating: Passes ASTM-E84

Origin: 100% Manufactured and Assembled in the US.

Warranty: All products are warranted against workmanship and manufacturing defects for five (5) years from date of purchase.



better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@bettersound.com
www.bettersound.com

Color Options




Milk White
ECC-08




Orange
ECC-06



Lime Green
ECC-10



Sky Blue
ECC-11



Navy Blue
ECC-12



Coffee
ECC-13



Blush Red
ECC-14



Yellow
ECC-115

Polyester Colours

Content: 100% Polyester

Size: 48.23" x 110"

Weight: 1/2 lb/sf (12 mm) 12 PCF

Thickness: 12 mm (0.47")

Acoustical Performance:

1/2"	Frequency/Hz	250	500	1000	2000	NRC
Distance From Wall	0mm	0.05	0.25	0.61	0.85	0.45
	50mm	0.46	0.80	1.04	1.00	0.80
	150mm	0.69	0.96	0.92	0.94	0.90

Fire Rating: Passes ASTM-E84

Warranty: All products are warranted against workmanship and manufacturing defects for two (2) years from date of purchase.



better sound
acoustics

16719 Fitzhugh Rd
Dripping Springs, TX 78620
512-503-3883
info@bettersound.com
www.bettersound.com